

Dehumidifier AQUASORB A-30B/ Bp

Dehumidifying capacity
at 20°C / 60%RH

0.5 kg/h

Dry air flow


400 m³/h

Useful options:

- Trolley
- Condensate collector
- Dry air spigot
- Control equipment




- Washable rotor
- Dry air connection (optional)
- Operates at dew-points below 0°C
- Condenses out the moisture
- Stainless steel chassis
- All energy accumulates in the dry air

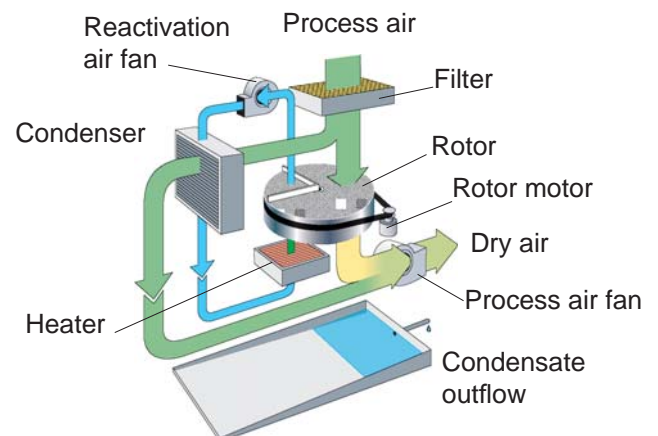

Contains the SSCR rotor -
one step ahead in
adsorption technology



The high number of channels
means that moisture is adsorbed
with extra efficiency!



Dehumidifier model	A-30 B	A-30 Bp
Nominal capacity *	0.5 kg/h	0.5 kg/h
Dry airflow**	400 m ³ /h	400 m ³ /h
Static pressure at disposal	0 Pa	200 Pa
Heater power	1kW	1kW
Maximum electric consumption	1.20 kW	1.22 kW
Supply fuse 230V / 50Hz	10 A	10 A
Weight	32 kg	32 kg

* Valid for inlet conditions 20°C / 60% RH. For other inlet conditions, the capacity can be calculated by using the correction factor from the diagram shown below.

** Volume flow for density 1.20 kg/ m³

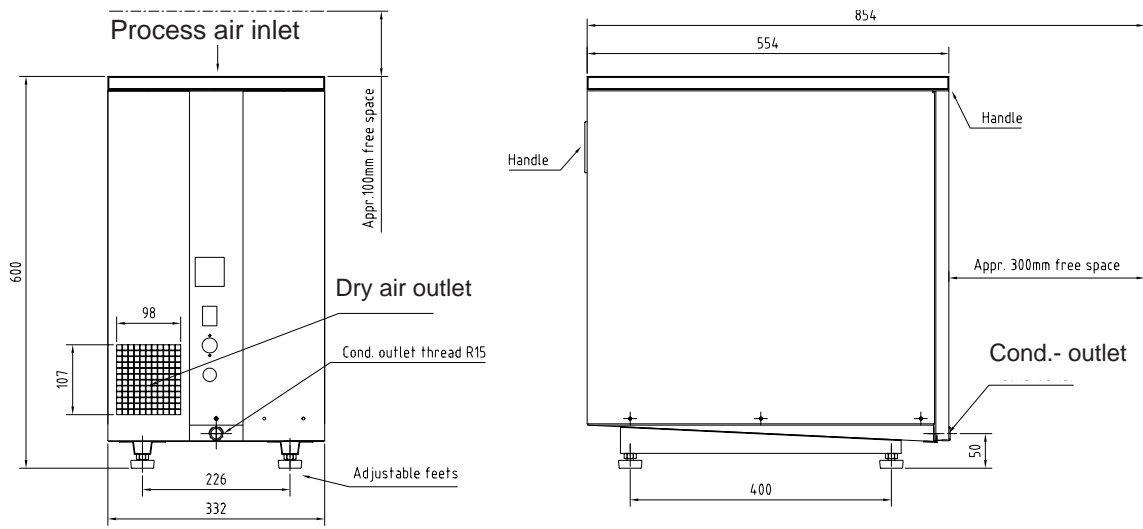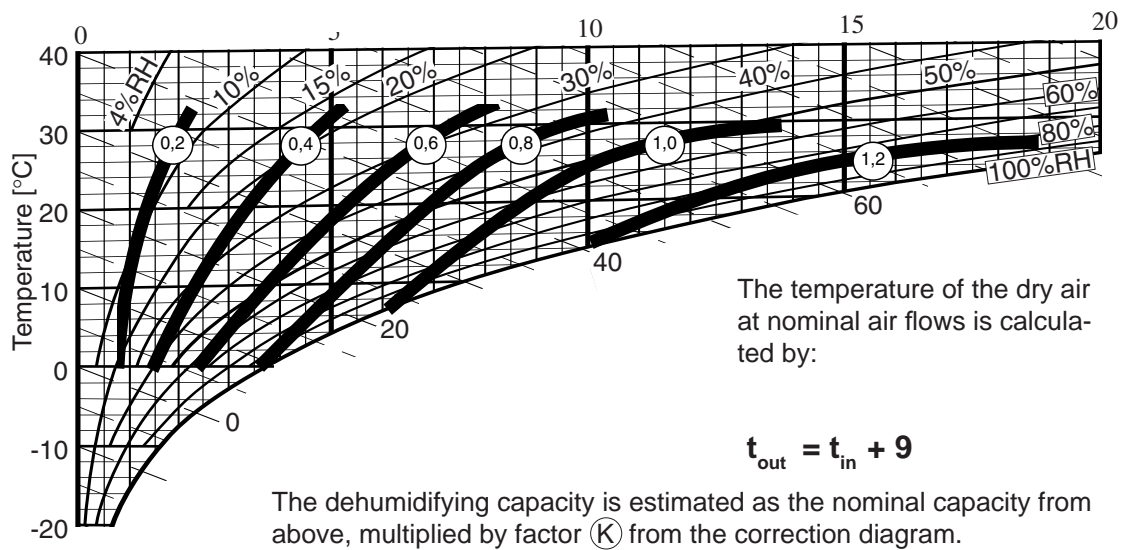

Subject to change without notice.
Download installation drawing at www.dst-sg.com

[mm]

Seibu Giken DST AB
Avestag, 33, S-163 53 Spånga,
Sweden www.dst-sg.com
E-mail: info@dst-sg.com
tel: +46-8 4457720; fax: +46-8 4457739

Representative: