

Dehumidifier CONSORB DC-10

Dehumidifying capacity
at 20°C/60%RH


0.6 kg/h

Dry air flow

190 m³/h




- Washable rotor
- No desiccant carry-over
- Stainless steel chassis
- Self-regulating heater
- Easy to maintain
- Long lifetime

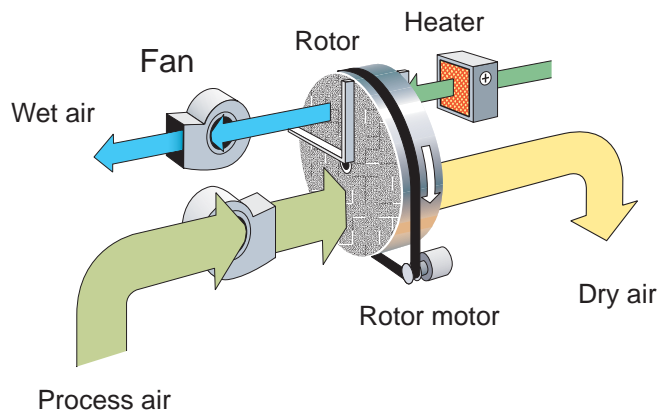



Contains the SSCR rotor -
one step ahead in
adsorption technology

The high number of channels
means that moisture is adsorbed
with extra efficiency!



Dehumidifier model	DC-10
Nominal capacity *	0.6 kg/h
Dry airflow**	190 m ³ /h
Normal wet air flow **	60 m ³ /h
Heater current ***	4.5 A
Maximum electric consumption	1.3 kW
Supply fuse 230V / 50Hz	10 A
Weight	15 kg

- * Valid for inlet conditions 20°C/60%RH. For other inlet conditions the capacity can be calculated by using the correction factor from the diagram shown below.
- ** Volume flow for density 1.20 kg/m³ Free blowing
- *** Thanks to the thermistor heater, the power can be steplessly varied by controlling the wet air flow.

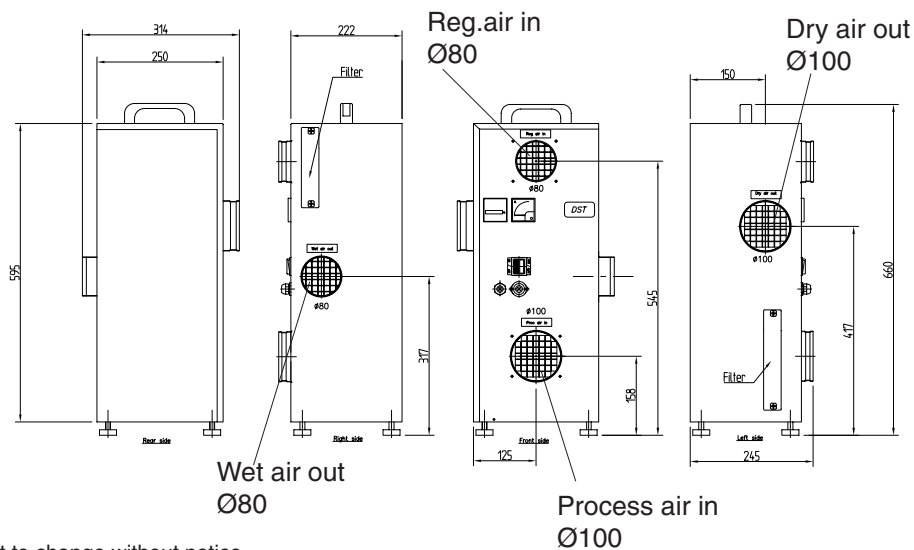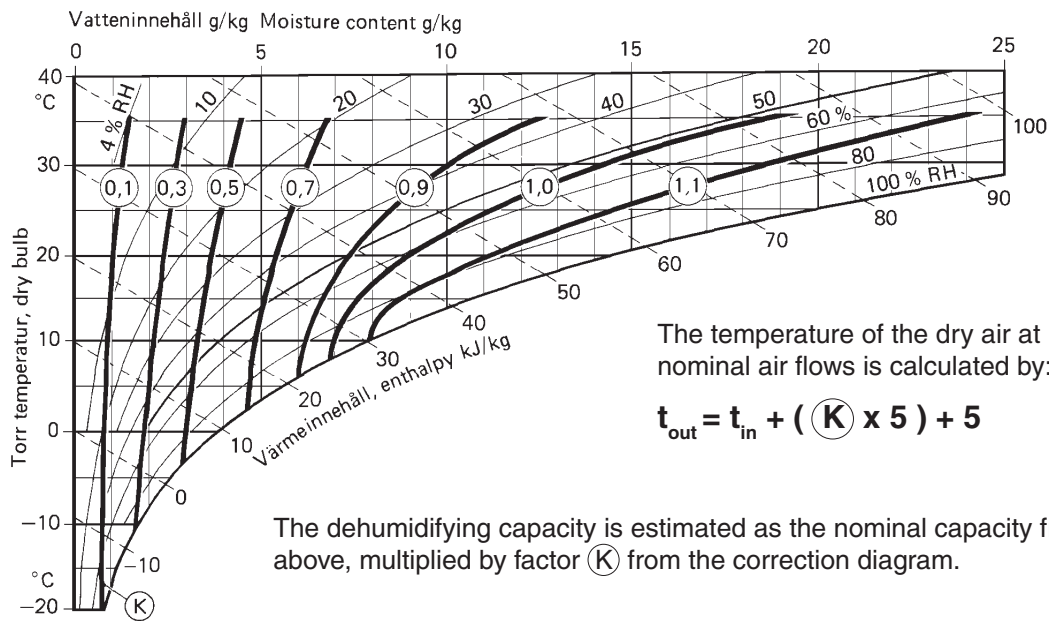

Subject to change without notice.
 Download installation drawing at www.dst-sg.com

[mm]