

# Dehumidifier RECUSORB DR-010B

Dehumidifying capacity  
at 20°C / 60%RH


**0.5 kg/h**

Dry air flow

**190 m<sup>3</sup>/h**




- Washable rotor
- No desiccant carry-over
- Stainless steel chassis
- Self-regulating heater
- Easy to maintain
- Long lifetime

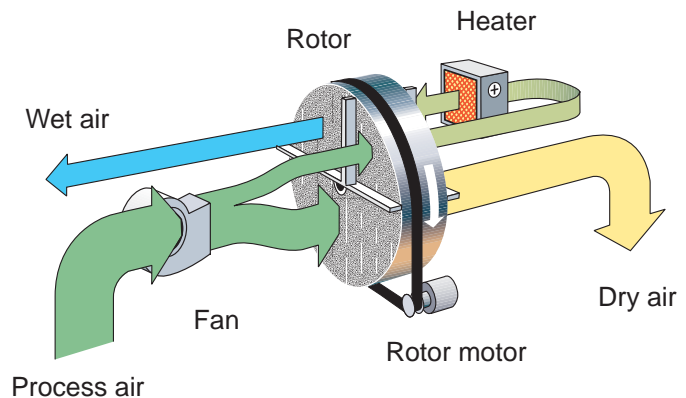



Contains the SSCR rotor -  
one step ahead in  
adsorption technology

The high number of channels  
means that moisture is adsorbed  
with extra efficiency!



Dehumidifier model	DR-010B
Nominal capacity *	0.5 kg/h
Dry airflow**	190 m <sup>3</sup> /h
Wet air flow **	40 m <sup>3</sup> /h
Heater current***	3 A / 690W
Maximum electric consumption	0.8 kW
Supply fuse 230V / 50Hz	10 A
Weight	12 kg

- \* Valid for inlet conditions 20°C/60%RH. For other inlet conditions the capacity can be calculated by using the correction factor from the diagram shown below.
- \*\* Volume flow for density 1.20 kg/m<sup>3</sup>. Free blowing
- \*\*\* Thanks to the thermistor heater, the power can be steplessly varied by controlling the wet air flow.

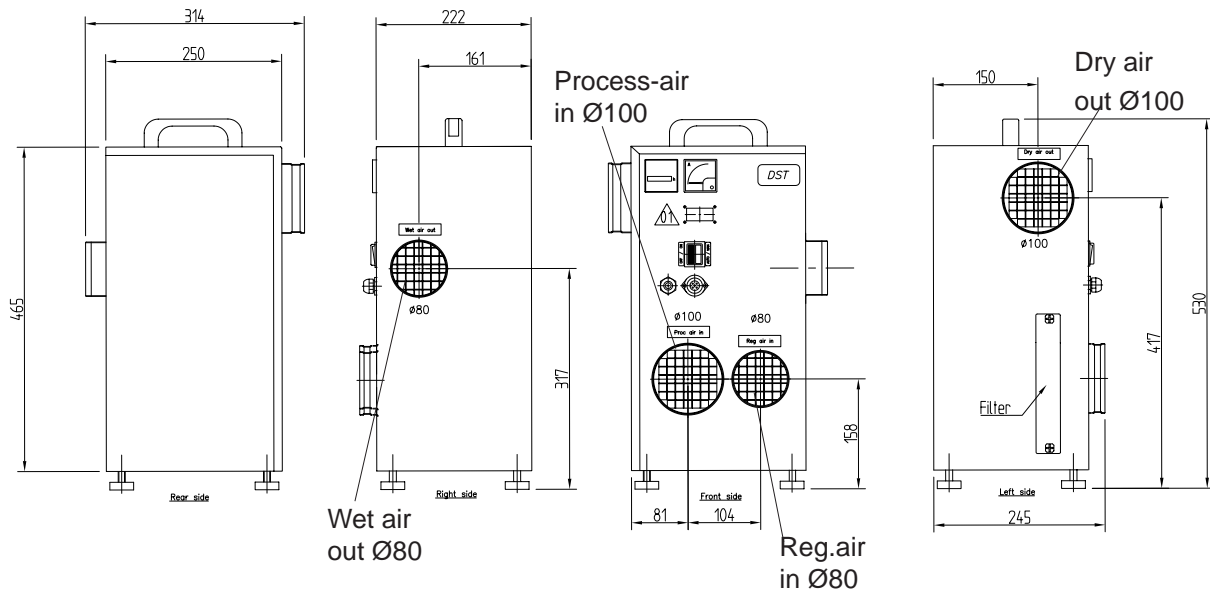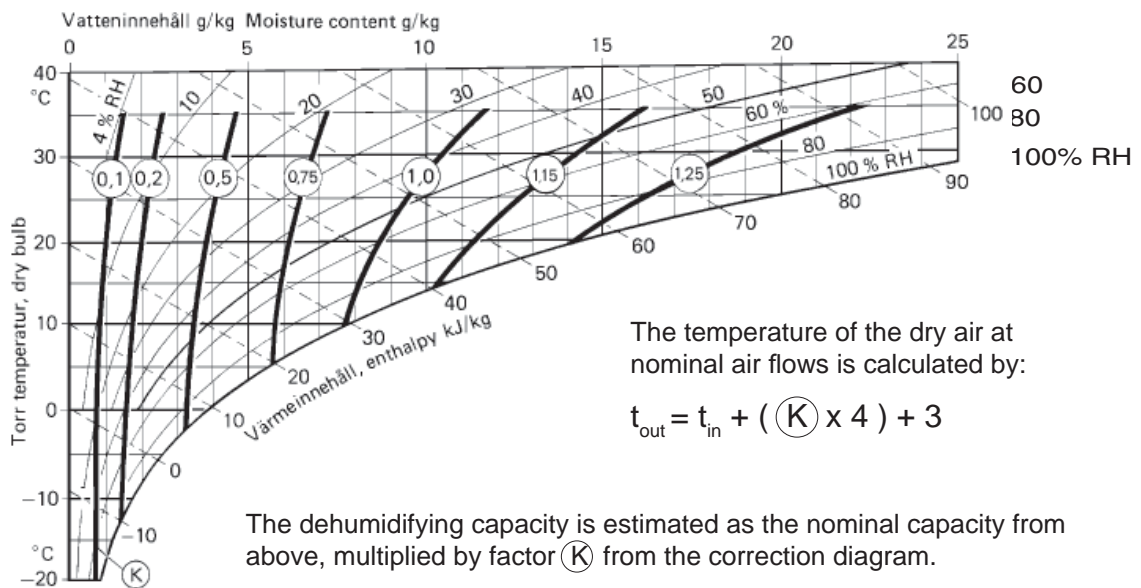

Subject to change without notice.  
 Download installation drawing at [www.dst-sg.com](http://www.dst-sg.com)

[mm]