

Dehumidifier RECUSORB DR-031C

Dehumidifying capacity
at 20°C / 60%RH


1.6 kg/h

Dry air flow

310 m³/h




- Washable rotor
- No desiccant carry-over
- Stainless steel chassis
- Self-regulating heater
- Easy to maintain
- Long lifetime

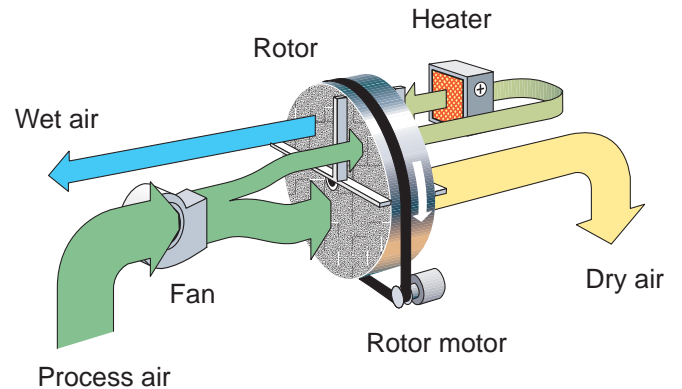

Contains the SSCR rotor
-one step ahead in
adsorption technology

The high number of channels
means that moisture is adsorbed
with extra efficiency!





Dehumidifier model	DR-031C
Nominal capacity *	1.6 kg/h
Dry airflow **	310 m ³ /h
Static pressure at disposal	350 Pa
Wet air flow ***	110 m ³ /h
Heater current ****	8 A
Maximum electric consumption	2.1 kW
Supply fuse 230V / 50Hz	10 A
Weight	28 kg

* Valid for inlet conditions 20°C / 60% RH. For other inlet conditions the capacity can be calculated by using the correction factor from the diagram shown below.

** Volume flow for density 1.20 kg/m³.

*** Volume flow for density 1.20 kg/m³. Free blowing

**** Thanks to the thermistor heater, the power can be steplessly varied by controlling the wet air flow.

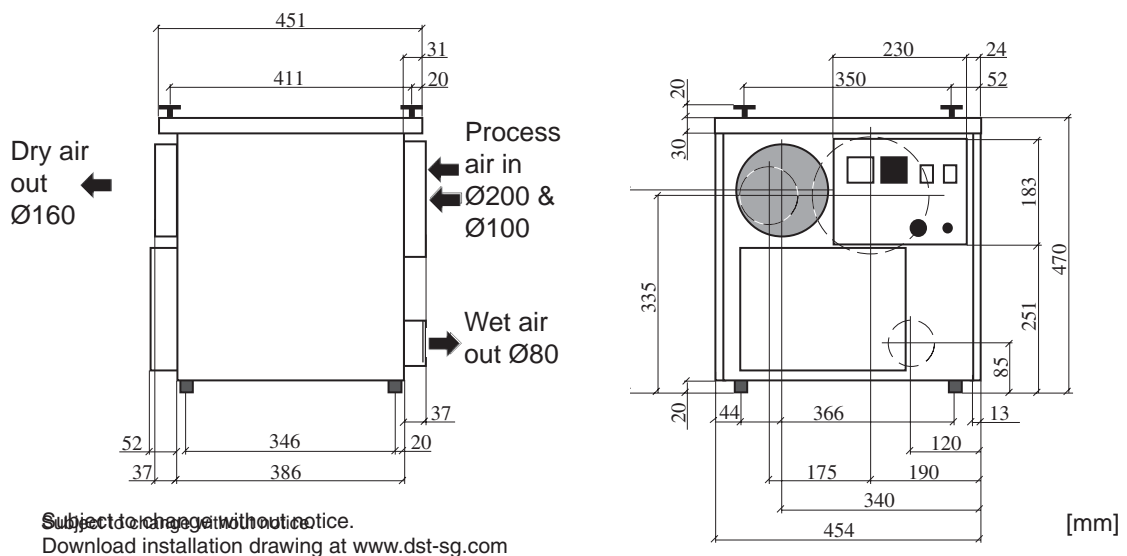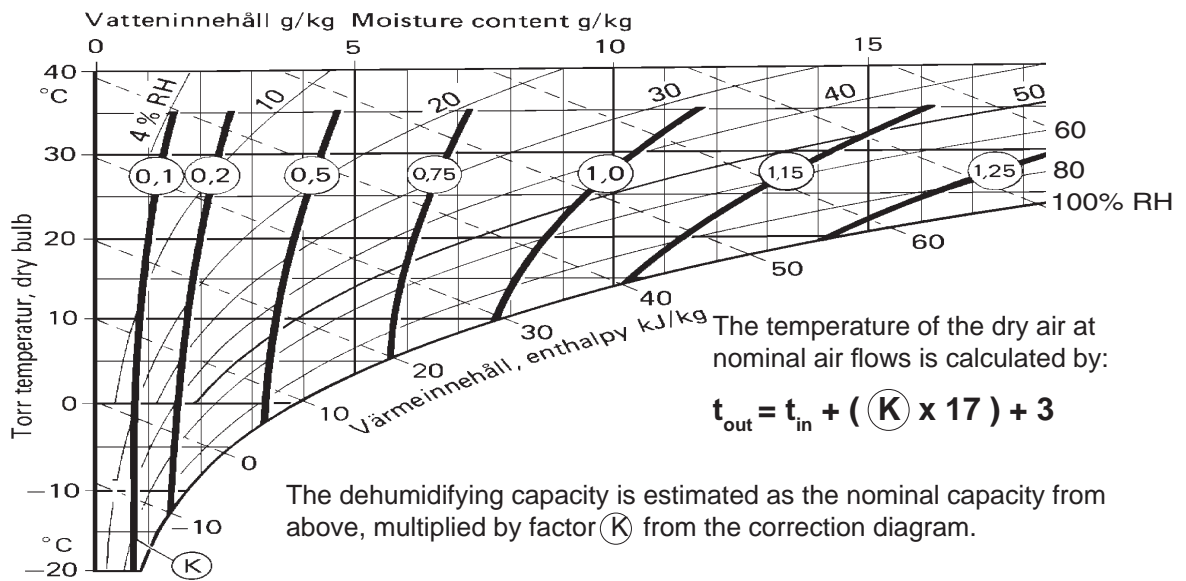

Seibu Giken DST AB
 Avestag, 33, S-163 53 Spånga, Sweden
www.dst-sg.com
 E-mail: info@dst-sg.com
 tel: +46-8 4457720; fax: +46-8 4457739

Representative: