

Dehumidifier RECUSORB R-060BR


Dehumidifying capacity
at 20°C / 60%RH

4.6 kg/h

Dry air flow

1000 m³/h

- Built-in heat recovery
- Low dry air temperature
- Long lifetime
- Washable rotor
- No desiccant carry-over
- Stainless steel chassis

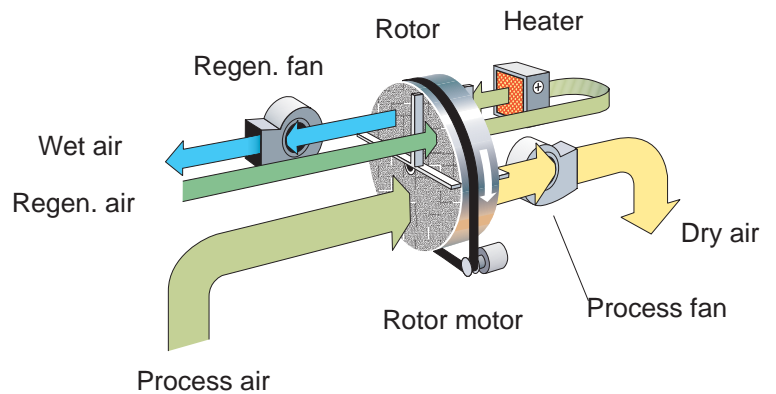

Contains the SSCR rotor -
one step ahead in
adsorption technology



The high number of channels
means that moisture is adsorbed
with extra efficiency!



Dehumidifier model	R-060BR
Nominal capacity *	4.6 kg/h
Dry air flow**	1000 m ³ /h
Static pressure at disposal	200 Pa
Wet air flow **	250 m ³ /h
Static pressure at disposal	50 Pa
Heater current	6 kW
Maximum electric consumption	6.4 kW
Supply fuse 3 x 230/400V 50Hz	25 / 16 A
Weight	63 kg

* Valid for inlet conditions 20°C/ 60%RH. For other inlet conditions the capacity can be calculated by using the correction factor from the diagram shown below.

** Volume flow for density 1.20 kg/m³.

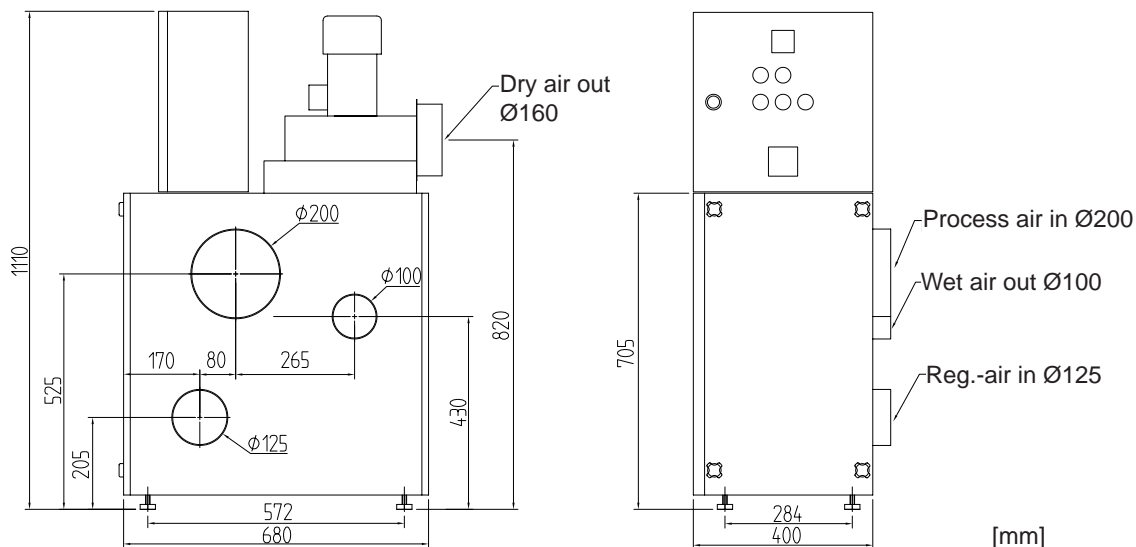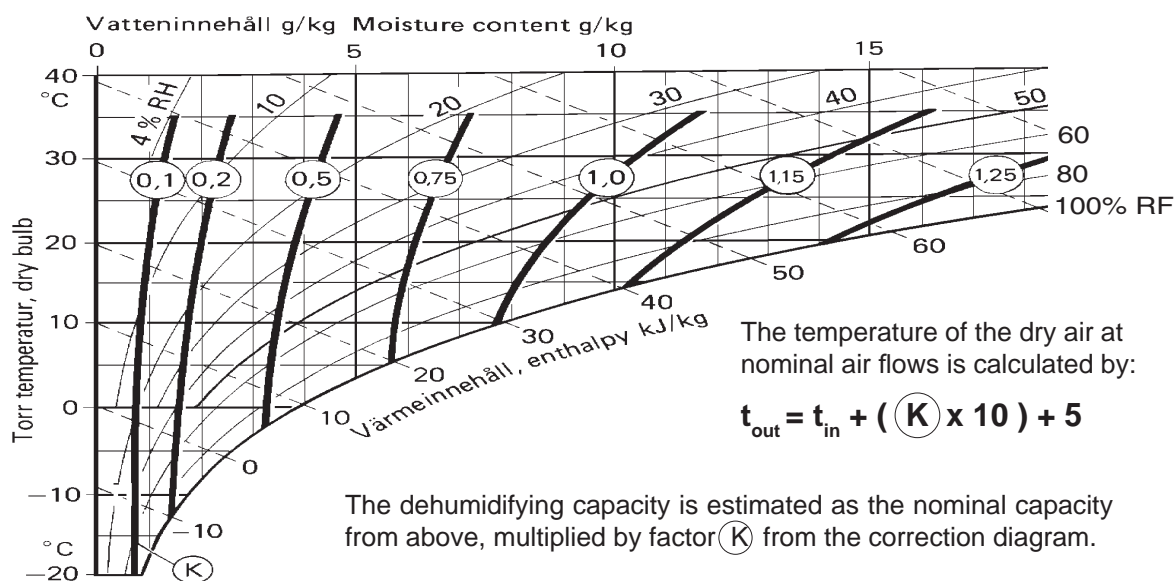

Subject to change without notice.
Download installation drawing at www.dst-sg.com

Seibu Giken DST AB

Avestag, 33, S-163 53 Spånga, Sweden
www.dst-sg.com E-mail: info@dst-sg.com
tel: +46(0)8-4457720; fax: +46(0)8-4457739

Representative: