

Dehumidifier Recusorb **RLZ-101, 101ICE, 102, 102 ICE, 102L, 104**




Dehumidifying capacity at 20°C / 60%RH

30,5 -70 kg/h

Dry air flow


4600- 12000 m³/h

- EC-motor or VSD for both process and regen fan
- Washable rotor
- No desiccant carry-over
- Built-in heat recovery
- Low dry air temperature
- Long lifetime
- Options:
 - Steam or gas regen heater
 - Pre- and post-treatment modules
 - Touchscreen with flowchart showing actual airflows and coil outputs
 - Communication with Modbus, Profibus or Bacnet
 - Insulated inlets
 - Stainless steel chassis

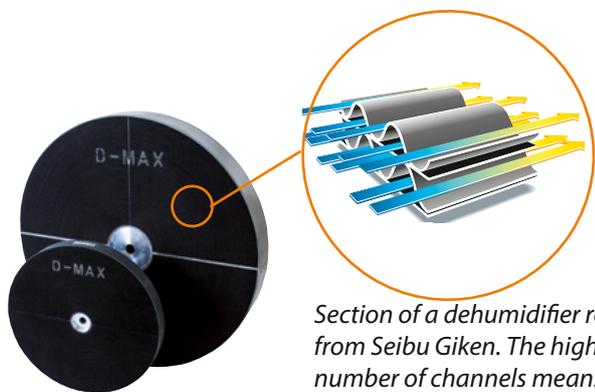

Section of a dehumidifier rotor from Seibu Giken. The high number of channels means that moisture is adsorbed with extra efficiency.

World leaders in dehumidification.

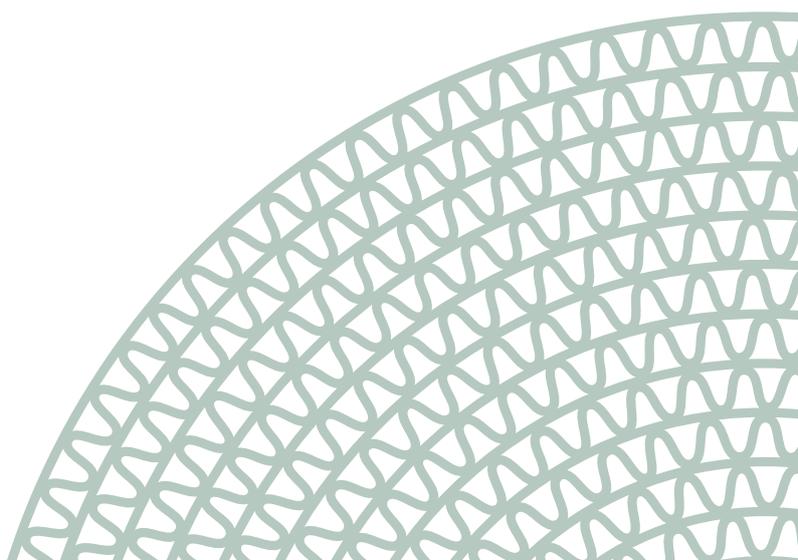


TECHNICAL DATA

Dehumidifier model	RLZ-101	RLZ-101 ICE	RLZ-102	RLZ-102 ICE	RLZ-102L	RLZ-104
Nominal capacity ¹ (kg/h)	30,5	34	49,5	56	60	70
Dry air flow ² (m ³ /h)	4600	9000	7000	12000	12000	10500
Static pressure at disposal (Pa)	300	300	300	300	300	200
Wet air flow ² (m ³ /h)	1300	1300	2100	2100	2400	2500
Static pressure at disposal (Pa)	200	200	200	200	200	200
Heater power ³ (kW)	40	40	63	63	70	80
Maximum electric consumption (kW)	43,6	46,3	70,4	72,7	79,4	91,5
Supply fuse 3 x 400V / 50Hz (A)	80	80	125	125	125	160
Weight (kg)	380	415	503	568	585	600

1. Valid for inlet conditions 20°C/60%RH.
2. Volume flow for density 1.20 kg/m³.
3. Available with electric heater, steam heater or gas heater.


PRINCIPLE / DIMENSIONS

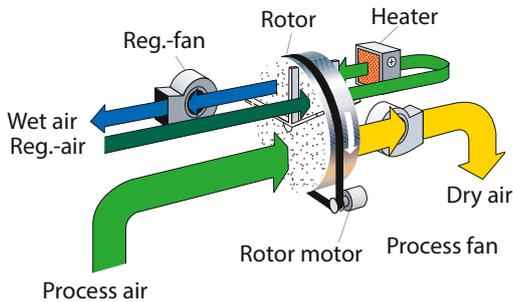

	Dimensions RLZ & RLZ ICE [mm]				
	RLZ-101	RLZ-101 ICE	RLZ-102	RLZ-102L /102 ICE	RLZ-104
A	1693	1770	1874	2246	2446
B	1292	1292	1292	1292	1292
C	1932	1932	1983	1983	2052
D	1000 x 500	1000 x 500	1000 x 500	1000 x 500	1000 x 500
E	560 x 245	720 x 306	720 x 306	800 x 356	800 x 356
F	400 x 300	400 x 300	400 x 300	400 x 300	400 x 300
G	450 x 194	450 x 194	450 x 194	450 x 194	504 x 214

DRAWING

Subject to change without notice. Download installation drawing at www.dst-sg.com

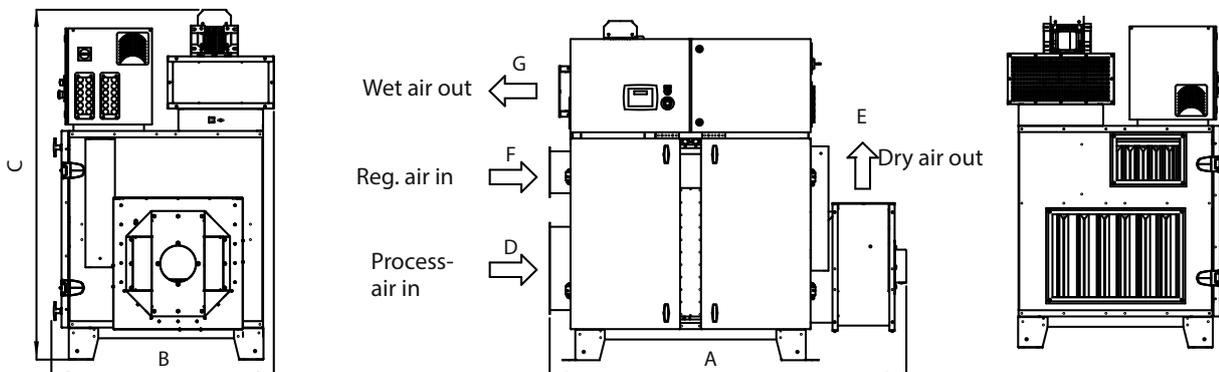

Updated 26.01



Sweden | +46 8 445 77 20
info@dst-sg.com | www.dst-sg.com